

Fig. 971 & 971G Fully-lugged, Lever/Gearbox Operated Wafer Pattern to BS EN 593:2009



FEATURES & BENEFITS

- Ductile Iron Body
- Aluminium Bronze Disc
- Liner bonded to steel backing ring
- High strength, low friction bearings for upper and lower shafts, to restrain shaft deflection and ensure effective stem sealing
- Long neck for insulation
- Maintenance free



MATERIAL SPECIFICATION

| Component | Material |
|---------------|-----------------------------------|
| Body | Ductile Iron BS EN 1563 ENJ51040 |
| Disc | Aluminium Bronze BS EN/1982 C333G |
| Liner | Nitrile Temp. -10 to 90°C |
| Shaft | Stainless Steel Type 410 |
| Taper Pin | Stainless Steel Type 316 |
| Key | Carbon Steel |
| O-Ring | Buna-N |
| Bushing | PTFE |
| Lever & Screw | Carbon Steel (Epoxy Paint) |
| Stop Plate | Carbon Steel (Zn Plated) |

PRESSURE/ TEMPERATURE RATING

PN16 from -10 up to 90°C

TEST PRESSURES

Each valve is individually hydrostatically tested to BS EN 12266-1 at the following test pressures.

Shell: 24 bar
Seat: 17.6 bar

SPECIFICATION

Fully-lugged.
Lever or gearbox.
Valves DN250 and larger supplied as standard with a fully enclosed gear operator.
Valves may be used for flow regulation.
Suitable for gas applications.
Fig. 971 and 971G are suitable for Group 1 and 2 gases and Group 1 and 2 liquids as defined by the Pressure Equipment Directive 97/23/EC.

DIMENSIONS & WEIGHTS


Fig. 971

| Nom Size | mm | 50 | 65 | 80 | 100 | 125 | 150 | 200 |
|----------|----|-----|-----|-----|------|------|------|------|
| A | mm | 195 | 207 | 213 | 232 | 245 | 257 | 305 |
| B | mm | 83 | 95 | 102 | 124 | 136 | 150 | 197 |
| C | mm | 44 | 48 | 48 | 54 | 57 | 57 | 63 |
| D | mm | 32 | 32 | 32 | 32 | 32 | 32 | 44 |
| E | mm | 102 | 121 | 130 | 171 | 197 | 219 | 268 |
| F | mm | 260 | 260 | 260 | 260 | 260 | 260 | 356 |
| G | mm | 32 | 46 | 64 | 90 | 111 | 145 | 193 |
| Weight | kg | 4 | 4.5 | 7.2 | 12.6 | 13.5 | 14.9 | 24.1 |

Fig. 971G

| Nom Size | mm | 50 | 65 | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 600 |
|----------|----|------|-----|------|------|-----|------|------|------|------|------|-------|-------|-------|-------|
| A | mm | 162 | 175 | 181 | 200 | 213 | 225 | 260 | 292 | 337 | 368 | 400 | 422 | 479 | 562 |
| B | mm | 83 | 95 | 102 | 124 | 136 | 150 | 197 | 210 | 248 | 279 | 305 | 381 | 381 | 457 |
| C | mm | 44 | 48 | 48 | 54 | 57 | 57 | 63 | 70 | 79 | 79 | 89 | 108 | 133 | 156 |
| D | mm | 42 | 42 | 42 | 42 | 42 | 42 | 40 | 40 | 40 | 40 | - | - | - | - |
| E | mm | 102 | 121 | 130 | 171 | 197 | 219 | 268 | 332 | 410 | 435 | 508 | 543 | 592 | 708 |
| F | mm | 150 | 150 | 150 | 150 | 300 | 300 | 300 | 300 | 300 | 300 | 450 | 450 | 450 | 450 |
| G | mm | 32 | 46 | 64 | 90 | 111 | 145 | 193 | 241 | 290 | 325 | 380 | 427 | 474 | 574 |
| K | mm | 240 | 240 | 240 | 240 | 240 | 240 | 230 | 230 | 230 | 230 | 277 | 277 | 321 | 335 |
| Weight | kg | 15.5 | 16 | 18.7 | 24.1 | 25 | 26.4 | 36.7 | 47.1 | 62.1 | 84.9 | 123.8 | 139.7 | 215.5 | 337.3 |

DIMENSIONAL DRAWINGS

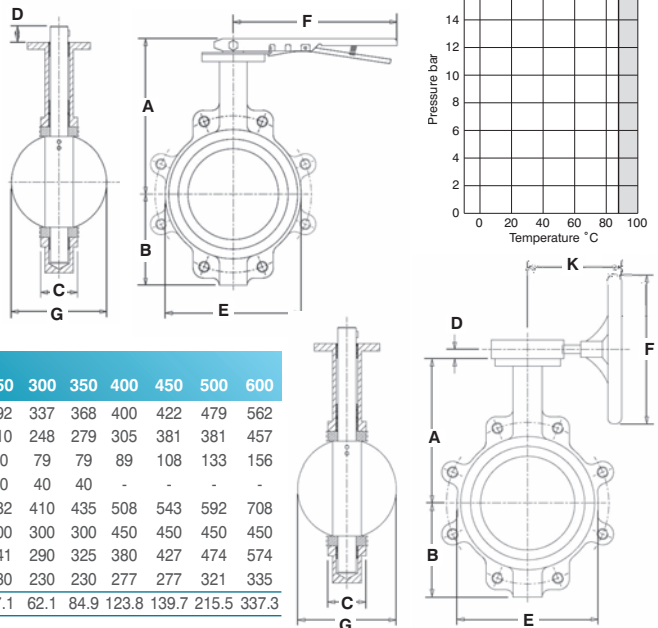

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Hattersley Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.